

Polygon Triangulation

Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing


triangulation
Partitioning a Polygon into
Monotone Pieces

Triangulating a Monotone Polygon

1393-1

Motivation:

The Art Gallery Problem

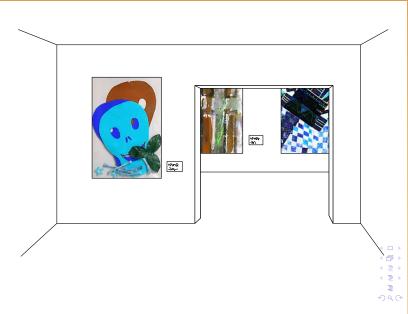



Computational Geometry

The Art Gallery Problem


Guarding and Triangulation

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Motivation:

The Art Gallery Problem

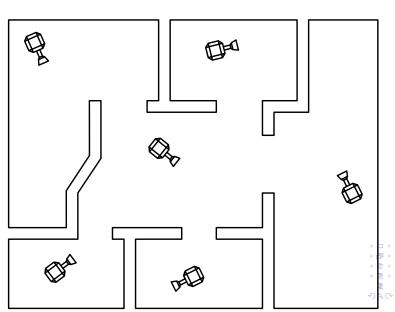



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Motivation:

The Art Gallery Problem

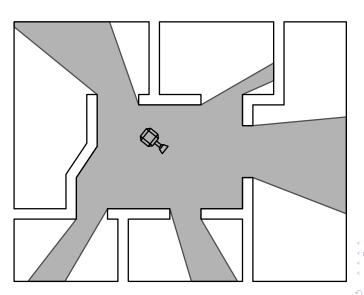



Computational Geometry

The Art Gallery Problem


Guarding and Triangulation

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Definitions

- Simple polygon: Regions enclosed by a single closed polygonal chain that does not intersect itself.
- Question: How many cameras do we need to guard a simple polygon?
- One solution: Decompose the polygon to parts which are simple to guard.

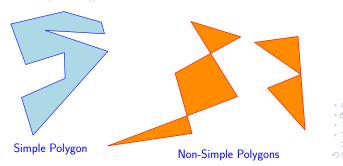



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

Computing riangulation

Partitioning a Polygon into Monotone Pieces

Definitions

- Simple polygon: Regions enclosed by a single closed polygonal chain that does not intersect itself.
- Question: How many cameras do we need to guard a simple polygon?
 - Answer: Depends on the polygon.
- One solution: Decompose the polygon to parts which are simple to guard.

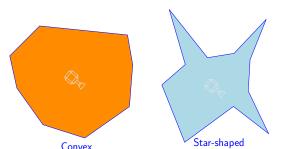



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


Computing riangulation

Partitioning a Polygon into Monotone Pieces

Polygon

Definitions

- Simple polygon: Regions enclosed by a single closed polygonal chain that does not intersect itself.
- Question: How many cameras do we need to guard a simple polygon?
 Answer: Depends on the polygon.
- One solution: Decompose the polygon to parts which are simple to guard.

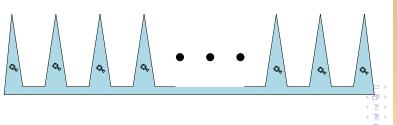



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


omputing iangulation

Partitioning a Polygon into Monotone Pieces

Definitions

diagonals:

 Triangulation: A decomposition of a polygon into triangles by a maximal set of non-intersecting diagonals.

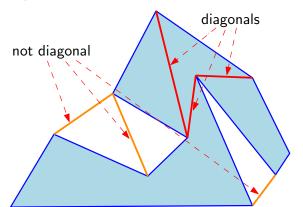



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


Computing

Partitioning a Polygon into Monotone Pieces

Triangulating a Monotone

Definitions

- diagonals:
- Triangulation: A decomposition of a polygon into triangles by a maximal set of non-intersecting diagonals.

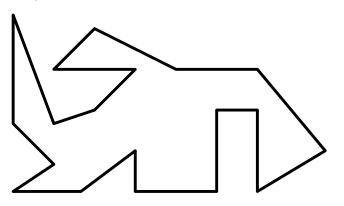



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

Computing riangulation

Partitioning a Polygon into

Definitions

- diagonals:
- Triangulation: A decomposition of a polygon into triangles by a maximal set of non-intersecting diagonals.

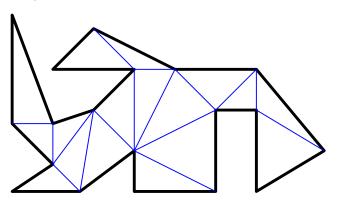



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


Computing

Partitioning a Polygon into Monotone Pieces



Definitions

- diagonals:
- Triangulation: A decomposition of a polygon into triangles by a maximal set of non-intersecting diagonals.

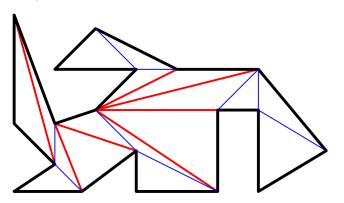



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing

Partitioning a Polygon into Monotone Pieces



Definitions

Guarding after triangulation:



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Definitions

Guarding after triangulation:

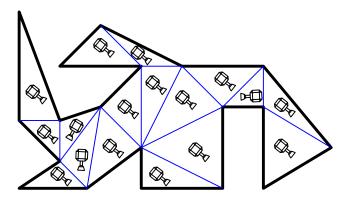



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Triangulating a Monotone


≣ >

1

200

Definitions

Guarding after triangulation:

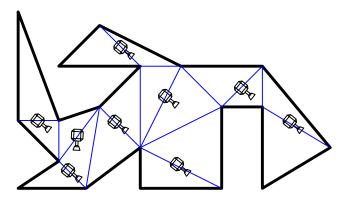



Computational Geometry

The Art Gallery


Guarding and Triangulations

triangulation

Monotone Pieces

Definitions

Guarding after triangulation:

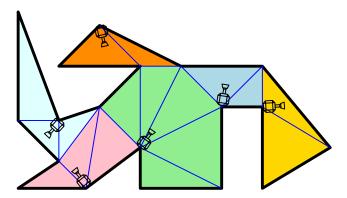



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


Computing triangulation

Partitioning a Polygon into Monotone Pieces



Definitions

Guarding after triangulation:

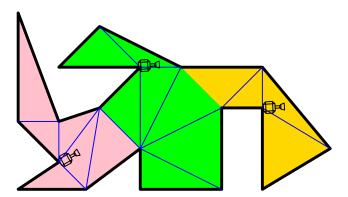



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Triangulating a Monotone

Questions:

- Does a triangulation always exist?
- How many triangles can there be in a triangulation?

Theorem 3.

Every simple polygon admits a triangulation, and any triangulation of a simple polygon with n vertices consists of exactly n-2 triangles.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

computing riangulation

Partitioning a Polygon into

Triangulating a Monotone

Questions:

- Does a triangulation always exist?
- How many triangles can there be in a triangulation?

Theorem 3.1

Every simple polygon admits a triangulation, and any triangulation of a simple polygon with n vertices consists of exactly n-2 triangles.

Proof. By induction.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing

Partitioning a Polygon into

iangulating a Monotor


Questions:

- Does a triangulation always exist?
- How many triangles can there be in a triangulation?

Theorem 3.1

Every simple polygon admits a triangulation, and any triangulation of a simple polygon with n vertices consists of exactly n-2 triangles.

Proof. By induction.

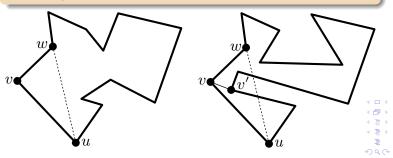



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

- \mathcal{T}_P : A triangulation of a simple polygon P.
- Select S ⊆ the vertices of P, such that any triangle in T_P has at least one vertex in S, and place the cameras at vertices in S.
- To find such a subset: find a 3-coloring of a triangulated polygon.
- In a 3-coloring of \mathcal{T}_P , every triangle has a blue, a red, and a black vertex. Hence, if we place cameras at all red vertices, we have guarded the whole polygon.
- By choosing the smallest color class to place the cameras, we can guard P using at most $\lfloor n/3 \rfloor$ cameras.



Computational Geometry

The Art Gallery
Problem
Guarding and
Triangulations

Computing triangulation
Partitioning a Polygon into Monotone Pieces
Triangulating a Monotone

- \mathcal{T}_P : A triangulation of a simple polygon P.
- Select $S \subseteq$ the vertices of P, such that any triangle in \mathcal{T}_P has at least one vertex in S, and place the cameras at vertices in S.
- To find such a subset: find a 3-coloring of a triangulated polygon.
- In a 3-coloring of \mathcal{T}_P , every triangle has a blue, a red, and a black vertex. Hence, if we place cameras at all red vertices, we have guarded the whole polygon.
- By choosing the smallest color class to place the cameras, we can guard P using at most $\lfloor n/3 \rfloor$ cameras.



Computational Geometry

The Art Gallery
Problem
Guarding and

Triangulations

Computing

triangulation
Partitioning a Polygon into
Monotone Pices
Triangulating a Monotone
Polygon

- \mathcal{T}_P : A triangulation of a simple polygon P.
- Select $S \subseteq$ the vertices of P, such that any triangle in \mathcal{T}_P has at least one vertex in S, and place the cameras at vertices in S.
- To find such a subset: find a 3-coloring of a triangulated polygon.
- In a a coloring of T_P , every triangle has a blue, a red, and a black vertex. Plance, if we place cameras at all red vertices, we have quarted the whole polygon.
- By choosing the smallest color class to place the cameras, we can guard P using at most $\lfloor n/3 \rfloor$



Computational Geometry

The Art Gallery
Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into Monotone Pieces Triangulating a Monotone



- \mathcal{T}_P : A triangulation of a simple polygon P.
- Select S ⊆ the vertices of P, such that any triangle in T_P has at least one vertex in S, and place the cameras at vertices in S.
- To find such a subset: find a 3-coloring of a triangulated polygon.
- In a 3-coloring of \mathcal{T}_P , every triangle has a blue, a red, and a black vertex. Hence, if we place cameras at all red vertices, we have guarded the whole polygon.
- By choosing the smallest color class to place the cameras, we can guard P using at most $\lfloor n/3 \rfloor$ cameras.



Computational Geometry

The Art Gallery
Problem
Guarding and

Guarding and Triangulations

triangulation

Partitioning a Polygon into

Monotone Pieces
Triangulating a Monotone



- \mathcal{T}_P : A triangulation of a simple polygon P.
- Select S ⊆ the vertices of P, such that any triangle in T_P has at least one vertex in S, and place the cameras at vertices in S.
- To find such a subset: find a 3-coloring of a triangulated polygon.
- In a 3-coloring of \mathcal{T}_P , every triangle has a blue, a red, and a black vertex. Hence, if we place cameras at all red vertices, we have guarded the whole polygon.
- By choosing the smallest color class to place the cameras, we can guard P using at most $\lfloor n/3 \rfloor$ cameras.



Geometry Computational

The Art Gallery
Problem
Guarding and
Triangulations

Computing triangulation

Partitioning a Polygon in


Partitioning a Polygon into Monotone Pieces Triangulating a Monotone Polygon



Does a 3-coloring always exist?

Dual graph:

- This graph $\mathcal{G}(\mathcal{T}_P)$ has a node for every triangle in \mathcal{T}_P .
- There is an arc between two nodes ν and μ if $t(\nu)$ and $t(\mu)$ share a diagonal.
- $\mathcal{G}(\mathcal{T}_P)$ is a tree.

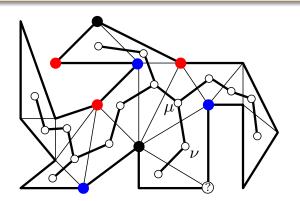



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


Computing triangulation

Partitioning a Polygon into Monotone Pieces

Does a 3-coloring always exist?

For 3-coloring:

- Traverse the dual graph (DFS).
- Invariant: so far everything is nice.
- Start from any node of $\mathcal{G}(\mathcal{T}_P)$; color the vertices.
- When we reach a node ν in \mathcal{G} , coming from node μ . Only one vertex of $t(\nu)$ remains to be colored.

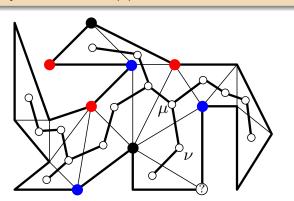



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


Computing triangulation

Partitioning a Polygon into Monotone Pieces

Art Gallery Theorem

Theorem 3.2 (Art Gallery Theorem)

For a simple polygon with n vertices, $\lfloor n/3 \rfloor$ cameras are occasionally necessary and always sufficient to have every point in the polygon visible from at least one of the cameras.

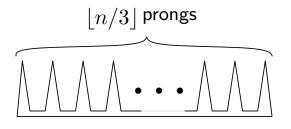



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Art Gallery Theorem

We will show:

How to compute a triangulation in $\mathcal{O}(n \log n)$ time.

Therefore:

Theorem 3.3

Let P be a simple polygon with n vertices. A set of $\lfloor n/3 \rfloor$ camera positions in P such that any point inside P is visible from at least one of the cameras can be computed in $\mathcal{O}(n \log n)$ time.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

iangulating a Monot olygon



Computational Geometry

How can we compute a triangulation of a given polygon?

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

Triangulation algorithms

- A really naive algorithm: check all $\binom{n}{2}$ choices for a diagonal, each takes $\mathcal{O}(n)$ time. Time complexity: $\mathcal{O}(n^3)$.
- A better naive algorithm: find an ear in $\mathcal{O}(n)$ time, then recurse. Total time: $\mathcal{O}(n^2)$.
- First non-trivial algorithm: $\mathcal{O}(n \log n)$ (1978).
- A long series of papers and algorithms in 80s until Chazelle produced an optimal $\mathcal{O}(n)$ algorithm in 1991.
- Linear time algorithm insanely complicated; there are randomized, expected linear time that are more accessible.
- Here we present a $\mathcal{O}(n \log n)$ algorithm.



Geometry Computational

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces



Algorithm Outline

Algorithm Outline

- Partition polygon into monotone polygons.
- Triangulate each monotone piece.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).



- A point p is below another point q if $p_y < q_y$ or $p_y = q_y$ and $p_x > q_x$.
- ullet p is above q if $p_y > q_y$ or $p_y = q_y$ and $p_x < q_x$



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation


Partitioning a Polygon into

Triangulating a Monotone Polygon

15/37

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


triangulation

Partitioning a Polygon into

Monotone Pieces
Triangulating a Monotone

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).





Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

riangulation

Partitioning a Polygon into Monotone Pieces

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).





Computational Geometry

The Art Gallery


Guarding and Triangulations

riangulation

Partitioning a Polygon into Monotone Pieces

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


riangulation

Partitioning a Polygon into Monotone Pieces

Monotone polygon

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


triangulation
Partitioning a Polygon into



Monotone polygon

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into

Monotone Pieces
Triangulating a Monoton

Monotone polygon

ℓ-monotone polygon

P is called monotone w. r. t. ℓ if $\forall \ell'$ perpendicular to ℓ the intersection of P with ℓ is connected (a line segment, a point, or empty).



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

triangulation Partitioning a Polygon into Monotone Pieces

Triangulating a Monotone Polygon

Definition:

- A point p is below another point q if $p_y < q_y$ or $p_y = q_y$ and $p_x > q_x$.
- p is above q if $p_y > q_y$ or $p_y = q_y$ and $p_x < q_x$.

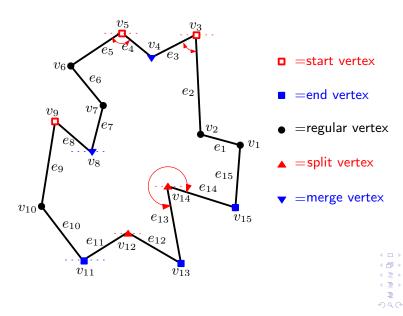



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into

Triangulating a Monoton

Lemma 3.4

If P has no split or merge vertices then it is y-monotone.

Proof. Assume P is not y-monotone.

P has been partitioned into y-monotone pieces once we get rid of its split and merge vertices.



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations


Computing
triangulation
Partitioning a Polygon into
Monotone Pieces

Lemma 3.4

If P has no split or merge vertices then it is y-monotone.

Proof. Assume P is not y-monotone.







Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces


Triangulating a Monotone Polygon


P has been partitioned into y-monotone pieces once we get rid of its split and merge vertices.

Lemma 3.4

If P has no split or merge vertices then it is y-monotone.

Proof. Assume P is not y-monotone.





P has been partitioned into y-monotone pieces once we get rid of its split and merge vertices.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces

Removing split vertices:

- A sweep line algorithm.
- Events: all the points
- Goal: To add diagonals from each split vertex to a vertex lying above it.
- helper(e_j): Lowest vertex above the sweep line s. t. the horizontal segment connecting the vertex to e_j lies inside P.
- Connect split vertices to the helper of the edge to their left



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces



Removing split vertices:

- A sweep line algorithm.
- Events: all the points
- Goal: To add diagonals from each split vertex to a vertex lying above it.
- helper(e_j): Lowest vertex above the sweep line s. t. the horizontal segment connecting the vertex to e_j lies inside P.
- Connect split vertices to the helper of the edge to their left



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces



Removing split vertices:

- A sweep line algorithm.
- Events: all the points
- Goal: To add diagonals from each split vertex to a vertex lying above it.
- $helper(e_j)$: Lowest vertex above the sweep line s. t. the horizontal segment connecting the vertex to e_j lies inside P.
- Connect split vertices to the helper of the edge to their left.





Computational Geometry


The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces

Removing split vertices:

- A sweep line algorithm.
- Events: all the points
- Goal: To add diagonals from each split vertex to a vertex lying above it.
- $helper(e_j)$: Lowest vertex above the sweep line s. t. the horizontal segment connecting the vertex to e_j lies inside P.
- Connect split vertices to the helper of the edge to their left.





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces

Removing merge vertices:

- Connect each merge vertex to the highest vertex below the sweep line in between e_j and e_k .
- But we do not know the point.
- When we reach a vertex v_m that replaces the helper of e_j , then this is the vertex we are looking for.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into

Removing merge vertices:

- Connect each merge vertex to the highest vertex below the sweep line in between e_j and e_k .
- But we do not know the point.
- When we reach a vertex v_m that replaces the helper of e_j , then this is the vertex we are looking for.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


triangulation

Partitioning a Polygon into



Removing merge vertices:

- Connect each merge vertex to the highest vertex below the sweep line in between e_j and e_k .
- But we do not know the point.
- When we reach a vertex v_m that replaces the helper of e_j , then this is the vertex we are looking for.

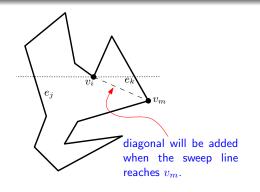



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces

For this approach, we need to find the edge to the left of each vertex. To do that:

- We store the edges of P intersecting the sweep line in the leaves of a dynamic binary search tree \mathcal{T} .
- Because we are only interested in edges to the left of split and merge vertices we only need to store edges in T that have the interior of P to their right.
- \odot With each edge in $\mathcal T$ we store its helper.
- We store P in DCEL form and make changes such that it remains valid.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

For this approach, we need to find the edge to the left of each vertex. To do that:

- We store the edges of P intersecting the sweep line in the leaves of a dynamic binary search tree \mathcal{T} .
- Because we are only interested in edges to the left of split and merge vertices we only need to store edges in T that have the interior of P to their right.
- \odot With each edge in \mathcal{T} we store its helper.
- We store P in DCEL form and make changes such that it remains valid.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into

Monotone Pieces

For this approach, we need to find the edge to the left of each vertex. To do that:

- We store the edges of P intersecting the sweep line in the leaves of a dynamic binary search tree \mathcal{T} .
- Because we are only interested in edges to the left of split and merge vertices we only need to store edges in T that have the interior of P to their right.
- \odot With each edge in $\mathcal T$ we store its helper.
- We store P in DCEL form and make changes such that it remains valid.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into

Triangulating a Monotone

For this approach, we need to find the edge to the left of each vertex. To do that:

- We store the edges of P intersecting the sweep line in the leaves of a dynamic binary search tree \mathcal{T} .
- Because we are only interested in edges to the left of split and merge vertices we only need to store edges in T that have the interior of P to their right.
- \odot With each edge in $\mathcal T$ we store its helper.
- We store P in DCEL form and make changes such that it remains valid.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into

Algorithm MAKEMONOTONE(P)

Input: A simple polygon P stored in a DCEL \mathcal{D} .

Output: A partitioning of P into monotone subpolygons, stored in \mathcal{D} .

- 1. Construct a priority queue \mathcal{Q} on the vertices of P, using their y-coordinates as priority. If two points have the same y-coordinate, the one with smaller x-coordinate has higher priority.
- 2. Initialize an empty binary search tree \mathcal{T} .
- 3. **while** Q is not empty
- 4. Remove the vertex v_i with the highest priority from Q.
- 5. Call the appropriate procedure to handle the vertex, depending on its type.



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces



Algorithm HandleStartVertex (v_i)

1. Insert e_i in \mathcal{T} and set $helper(e_i)$ to v_i .

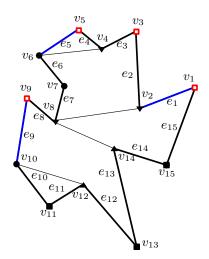



Computational Geometry

The Art Gallery Problem

Guarding and Triangulation


triangulation Partitioning a Polygon into

Triangulating a Monotone



Algorithm HANDLEENDVERTEX (v_i)

- 1. **if** $helper(e_{i-1})$ is a merge vertex
- 2. **then** Insert the diagonal connecting v_i to $helper(e_{i-1})$ in \mathcal{D} .
- 3. Delete e_{i-1} from \mathcal{T} .





Computational Geometry

The Art Gallery
Problem

Triangulations


Computing

triangulation
Partitioning a Polygon into
Monotone Pieces

riangulating a Monot olygon

Algorithm HANDLESPLITVERTEX (v_i)

- 1. Search in $\mathcal T$ to find the edge e_j directly left of v_i .
- 2. Insert the diagonal connecting v_i to $helper(e_j)$ in \mathcal{D} .
- 3. $helper(e_j) \leftarrow v_i$.
- 4. Insert e_i in \mathcal{T} and set $helper(e_i)$ to v_i .





Computational Geometry

The Art Gallery Problem


Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces

Triangulating a Polygon

Algorithm HandleMergeVertex (v_i)

- 1. **if** $helper(e_{i-1})$ is a merge vertex
- 2. **then** Insert the diag. v_i to $helper(e_{i-1})$ in \mathcal{D} .
- 3. Delete e_{i-1} from \mathcal{T} .
- 4. Search in \mathcal{T} to find e_j directly left of v_i .
- 5. **if** $helper(e_j)$ is a merge vertex
- 6. **then** Insert the diag. v_i to $helper(e_j)$ in \mathcal{D} .
- 7. $helper(e_j) \leftarrow v_i$.





Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

Computing triangulation Partitioning a Polygon into Monotone Pieces

riangulating a Mond olygon

Algorithm HANDLEREGULARVERTEX (v_i)

- 1. **if** the interior of P lies to the right of v_i
- 2. **then if** $helper(e_{i-1})$ is a merge vertex
- 3. **then** Insert the diag. v_i to $helper(e_{i-1})$ in \mathcal{D} .
- 4. Delete e_{i-1} from \mathcal{T} .
- 5. Insert e_i in \mathcal{T} and set $helper(e_i)$ to v_i .
- 6. **else** Search in \mathcal{T} to find e_j directly left of v_i .
- 7. **if** $helper(e_j)$ is a merge vertex
- 8. **then** Insert the diag. v_i to $helper(e_j)$ in \mathcal{D} .
- 9. $helper(e_j) \leftarrow v_i$





Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

triangulation
Partitioning a Polygon into
Monotone Pieces

Algorithm Makemonotone adds a set of non-intersecting diagonals that partitions ${\cal P}$ into monotone subpolygons.

Proof. (For split vertices) (other cases are similar)

- No vertex inside R.
- No intersection between $v_i v_m$ and edges of P.
- No intersection between $v_i v_m$ and previous diag. R is empty, endpoints of previously added edges: above v_i .





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


triangulation
Partitioning a Polygon into
Monotone Pieces



Algorithm MakeMonotone adds a set of non-intersecting diagonals that partitions ${\cal P}$ into monotone subpolygons.

Proof. (For split vertices) (other cases are similar)

- No vertex inside R.
- No intersection between $v_i v_m$ and edges of P.
- No intersection between v_iv_m and previous diag. R is empty, endpoints of previously added edges: above v_i .





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


triangulation
Partitioning a Polygon into
Monotone Pieces



Algorithm MakeMonotone adds a set of non-intersecting diagonals that partitions ${\cal P}$ into monotone subpolygons.

Proof. (For split vertices) (other cases are similar)

- No vertex inside R.
- No intersection between $v_i v_m$ and edges of P.
- No intersection between v_iv_m and previous diag. R is empty, endpoints of previously added edges: above v_i .





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


triangulation
Partitioning a Polygon into
Monotone Pieces



Algorithm Makemonotone adds a set of non-intersecting diagonals that partitions ${\cal P}$ into monotone subpolygons.

Proof. (For split vertices) (other cases are similar)

- No vertex inside R.
- No intersection between $v_i v_m$ and edges of P.
- No intersection between $v_i v_m$ and previous diag. R is empty, endpoints of previously added edges: above v_i .





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations


Computing
triangulation
Partitioning a Polygon into
Monotone Pieces



Algorithm MakeMonotone adds a set of non-intersecting diagonals that partitions ${\cal P}$ into monotone subpolygons.

Proof. (For split vertices) (other cases are similar)

- No vertex inside R.
- No intersection between $v_i v_m$ and edges of P.
- No intersection between v_iv_m and previous diag. R is empty, endpoints of previously added edges: above v_i .





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into

Monotone Pieces



Running time/ Space complexity

Running time:

- Constructing the priority gueue $Q: \mathcal{O}(n)$ time.
- Initializing \mathcal{T} : $\mathcal{O}(1)$ time.
- To handle an event, we perform:
 - **1** one operation on $Q: \mathcal{O}(\log n)$ time.
 - 2 at most one query on \mathcal{T} : $\mathcal{O}(\log n)$ time.
 - 3 one insertion, and one deletion on \mathcal{T} : $\mathcal{O}(\log n)$ time.
 - lacktriangle we insert at most two diagonals into \mathcal{D} : $\mathcal{O}(1)$ time.



Computational Geometry

The Art Gallery

Partitioning a Polygon into Monotone Pieces

Running time/ Space complexity

Running time:

- Constructing the priority queue $Q: \mathcal{O}(n)$ time.
- Initializing \mathcal{T} : $\mathcal{O}(1)$ time.
- To handle an event, we perform:
 - one operation on Q: $\mathcal{O}(\log n)$ time.
 - 2 at most one query on \mathcal{T} : $\mathcal{O}(\log n)$ time.
 - 3 one insertion, and one deletion on \mathcal{T} : $\mathcal{O}(\log n)$ time.
 - ullet we insert at most two diagonals into \mathcal{D} : $\mathcal{O}(1)$ time.

Space Complexity:

The amount of storage used by the algorithm is clearly linear: every vertex is stored at most once in Q, and every edge is stored at most once in \mathcal{T} .



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing riangulation

Partitioning a Polygon into Monotone Pieces



Monotone Decomposition:



Computational Geometry

Theorem 3.6

A simple polygon with n vertices can be partitioned into y-monotone polygons in $\mathcal{O}(n\log n)$ time with an algorithm that uses $\mathcal{O}(n)$ storage.

The Art Gallery Problem

Guarding and Triangulations

triangulation Partitioning a Polygon into





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing

triangulation

Partitioning a Polygon into Monotone Pieces

Triangulating a Monotone Polygon



Triangulating a Monotone Polygon

Triangulation Algorithm:

- The algorithm handles the vertices in order of decreasing *y*-coordinate. (Left to right for points with same *y*-coordinate).
- The algorithm requires a stack S as auxiliary data structure. It keeps the points that handled but might need more diagonals.
- When we handle a vertex we add as many diagonals from this vertex to vertices on the stack as possible.
- Algorithm invariant: the part of P that still needs to be triangulated, and lies above the last vertex that has been encountered so far, looks like a funnel turned upside down.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into

Monotone Pieces
Triangulating a Monotone
Polygon

Triangulating a Monotone Polygon

Triangulation Algorithm:

- The algorithm handles the vertices in order of decreasing y-coordinate. (Left to right for points with same y-coordinate).
- 2 The algorithm requires a stack S as auxiliary data structure. It keeps the points that handled but might need more diagonals.
- When we handle a vertex we add as many diagonals from this vertex to vertices on the stack as possible.
- Algorithm invariant: the part of P that still needs to be triangulated, and lies above the last vertex that has been encountered so far, looks like a funnel turned upside down.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation
Partitioning a Polygon into

Monotone Pieces
Triangulating a Monotone
Polygon

Triangulating a Monotone Polygon

Triangulation Algorithm:

- The algorithm handles the vertices in order of decreasing y-coordinate. (Left to right for points with same y-coordinate).
- The algorithm requires a stack S as auxiliary data structure. It keeps the points that handled but might need more diagonals.
- When we handle a vertex we add as many diagonals from this vertex to vertices on the stack as possible.
- Algorithm invariant: the part of P that still needs to be triangulated, and lies above the last vertex that has been encountered so far, looks like a funnel turned upside down.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

riangulation

Partitioning a Polygon into Monotone Pieces

Triangulation Algorithm:

- The algorithm handles the vertices in order of decreasing *y*-coordinate. (Left to right for points with same *y*-coordinate).
- The algorithm requires a stack S as auxiliary data structure. It keeps the points that handled but might need more diagonals.
- When we handle a vertex we add as many diagonals from this vertex to vertices on the stack as possible.
- Algorithm invariant: the part of P that still needs to be triangulated, and lies above the last vertex that has been encountered so far, looks like a funnel turned upside down.



Computational Geometry


The Art Gallery Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into

Monotone Pieces
Triangulating a Monotone
Polygon

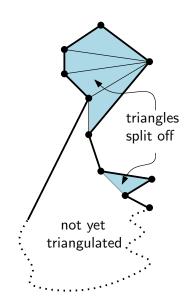



Computational Geometry

The Art Gallery Problem

Guarding and Triangulation

Computing

Partitioning a Polygon into Monotone Pieces

Case 1: v_i and top of stack on different chains



Computational Geometry

The Art Gallery Problem


Guarding and Triangulation

Computir

Partitioning a Polygon into Monotone Pieces

Triangulating a Monotone Polygon

Case 1: v_j and top of stack on different chains

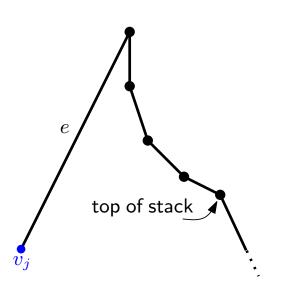



Computational Geometry


The Art Gallery Problem

Guarding and Triangulation

Computing

Partitioning a Polygon into Monotone Pieces

Case 1: v_j and top of stack on different chains

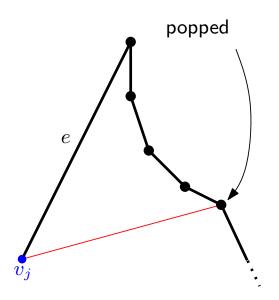



Computational Geometry


The Art Gallery Problem

Guarding and Triangulation

Computing riangulation

Partitioning a Polygon into Monotone Pieces

Case 1: v_j and top of stack on different chains

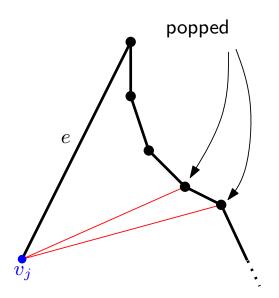



Computational Geometry


The Art Gallery Problem

Guarding and Triangulation

Computing

Partitioning a Polygon into Monotone Pieces

Case 1: v_j and top of stack on different chains

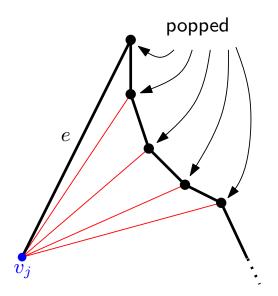



Computational Geometry


The Art Gallery Problem

Guarding and Triangulation

Computing riangulation

Partitioning a Polygon into Monotone Pieces

Case 1: v_j and top of stack on different chains

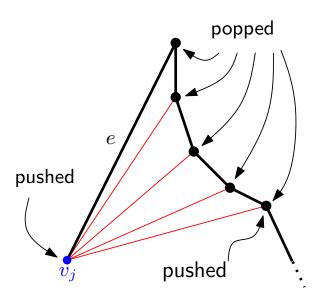



Computational Geometry

The Art Gallery Problem

Guarding an Triangulation

Computing riangulation

Partitioning a Polygon into Monotone Pieces



Case 2: v_j and top of stack on same chain




Computational Geometry

The Art Gallery Problem

Guarding an Triangulation

Computi

Partitioning a Polygon into Monotone Pieces



Case 2: v_j and top of stack on same chain




Computational Geometry

The Art Gallery Problem

Guarding and Triangulation

Computing

Partitioning a Polygon into Monotone Pieces

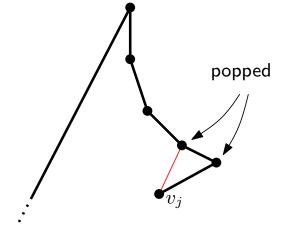

Case 2: v_j and top of stack on same chain




Computational Geometry

The Art Gallery Problem

Guarding and Triangulation

Computing

Partitioning a Polygon into Monotone Pieces

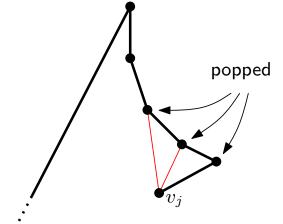

Case 2: v_j and top of stack on same chain



Computational Geometry


The Art Gallery Problem

Guarding and Triangulation

Computing

Partitioning a Polygon into Monotone Pieces

Triangulating a Monotone Polygon

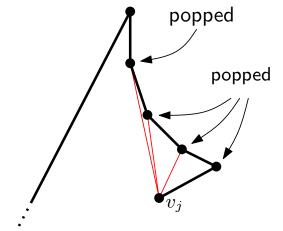

= '

QQ

96


Case 2: v_i and top of stack on same chain




Computational Geometry

The Art Gallery

Monotone Pieces

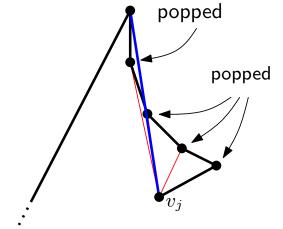

Case 2: v_j and top of stack on same chain

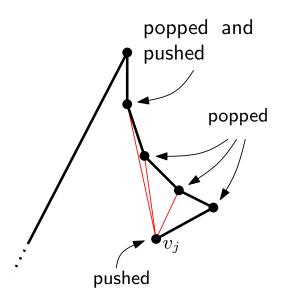



Computational Geometry

The Art Gallery Problem


Guarding and Triangulations

Computing

Partitioning a Polygon into



Case 2: v_j and top of stack on same chain

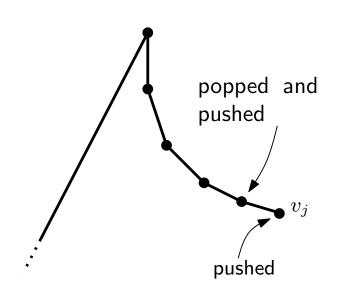



Computational Geometry

The Art Gallery Problem

Guarding and Triangulation

Computing triangulation

Partitioning a Polygon into

Algorithm TriangulateMonotonePolygon(P)

Input: A strictly y-monotone polygon P stored in \mathcal{D} .

Output: A triangulation of P stored in \mathcal{D} .

- 1. Merge the vertices on the left chain and the vertices on the right chain of P into one sequence, sorted on decreasing y-coordinate. Let u_1, \ldots, u_n denote the sorted sequence.
- 2. Initialize an empty stack S, and push u_1 and u_2 onto it.
- 3. for $j \leftarrow 3$ to n-1

4.

5.

if u_j and the vertex on top of S are on different chains

then Pop all vertices from S.

6. Insert into \mathcal{D} a diagonal from u_j to each popped vertex, except the last one.

7. Push u_{j-1} and u_j onto S.

8. **else** Pop one vertex from S.

Pop the other vertices from \mathcal{S} as long as the diagonals from u_j to them are inside P . Insert these diagonals into \mathcal{D} . Push the last vertex that has been popped back onto \mathcal{S} .

10. Push u_j onto S.

11. Add diagonals from u_n to all stack vertices except the first and the last one.



Geometry Computational

The Art Gallery Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into Monotone Pieces Triangulating a Monotone

Polygon

< A →

< ≣ →

₽

Polygon Triangulation

Theorem 3.8

A simple polygon with n vertices can be triangulated in $\mathcal{O}(n\log n)$ time with an algorithm that uses O(n) storage.

Theorem 3.9

A planar subdivision with n vertices in total can be triangulated in $\mathcal{O}(n \log n)$ time with an algorithm that uses $\mathcal{O}(n)$ storage.



Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

triangulation

Partitioning a Polygon into

Partitioning a Polygon into Monotone Pieces


Polygon Triangulation

Theorem 3.8

A simple polygon with n vertices can be triangulated in $\mathcal{O}(n\log n)$ time with an algorithm that uses O(n) storage.

Theorem 3.9

A planar subdivision with n vertices in total can be triangulated in $\mathcal{O}(n\log n)$ time with an algorithm that uses $\mathcal{O}(n)$ storage.





Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

riangulation

Partitioning a Polygon into Monotone Pieces



END.

Computational Geometry

The Art Gallery Problem

Guarding and Triangulations

Computing triangulation

Partitioning a Polygon into Monotone Pieces

